HX-P510 SERIES 0 to 5 VDC or 0 to 10 VDC OUTPUT

The HX-P510 position transducer provides a 0 to 5 or 0 to 10 VDC output utilizing a potentiometric sensor. Pins B and C of the connector are both COMMON and are connected together internally at the transducer enabling a three or four wire connection. With adjustable zero and span, zero position may be set within the first 30% of the total measurement range. The span allows maximum output voltage to




be adjusted to 5 VDC or 10 VDC for displacements between 80% and 100% of total range. The HX-P510 may be powered by an unregulated supply voltage in the range of 4.9 to 30 VDC.

General

Available Measurement Ranges See Supplemental Data¹, Table 12 Sensing Device..... Precision Potentiometer Connector MS3102E-14S-6P Mating Connector (included) MS3106E-14S-6S Performance Linearity 2", 3", 4", 5" & 6"Ranges ±0.30% Full Scale 10", 15", 20" & 25" Ranges $\pm 0.20\%$ Full Scale All other ranges ±0.15% Full Scale Repeatability ±0.015% Full Scale Resolution..... Essentially Infinite Electrical Output.....0 to 5 VDC adjustable to 10 VDC Excitation Voltage 4.9 to 30 VDC Excitation Current 25 mA max. Output Impedance...... 10Ω max. Output Load......5KΩ min. Insulation Resistance 100 megohms min. at 100 VDC Zero Adjustment Range 0 to 30% of Range Span Adjustment Range 80% to 100% of Range Protection...... Reversed Polarity


Environmental

-		
	Operating temperature	-40°C to +85°C
	Storage Temperature	-55° to +100°C
	Operating humidity	100%
	Vibration	
	Shock	50 G's 0.1 ms max.
	Ingress Protection	
	Exclusive of Wire Rope Area	NEMA 4 (IP-65)
	Optional Ingress Protection	NEMA 6 (IP-68)

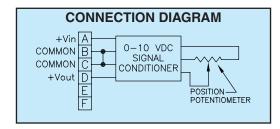

FOOTNOTES TO SPECIFICATIONS

1. Supplemental Data section located at end of HX Series pages.

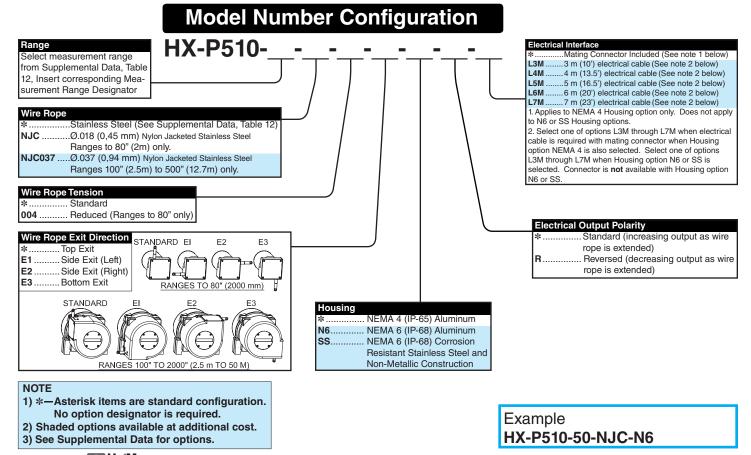


Contraction of the second seco

- ADDITIONAL OPTIONS -

OPTION	OPTION DESIGNATOR	DESCRIPTION					
Nylon jacketed wire rope (Ranges to 80" only)	NJC	Replaces standard stainless steel wire rope with \emptyset .018 nylon jack- eted wire rope. This option increases wire rope life dramatically but may increase non-linearity by as much as ±.05% of full scale.					
Nylon jacketed wire rope (Ranges 100" to 500" only)	NJC037	Replaces standard stainless steel wire rope with Ø.037 nylon jacketed wire rope.					
Reversed output	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity signal.					
NEMA 6, IP-68 capability	N6	Connector is replaced with a bulkhead fitting and a designated length of urethane jacketed, shielded, twisted pair cable. Retraction mechanism and electrical components are sealed to NEMA 6, IP-68 capability. No connector.					
Corrosion Resistant Construction	SS	All external anodized aluminum parts of transducer are replaced with stainless steel and corrosion resistant plastic. Transducer is sealed to NEMA 6, IP-68 capability. Urethane jacketed, shielded, twisted pair cable exits unit. No connector.					
Non-standard potentiometer (Applies to HX-PA only)	РХК	Replace "X" in option designator with required potentiometer value in K ohms. Non-standard potentiometer linearity is as follows: Ranges 0 to 2" to 0 to 5"					
Alternate wire rope exit Measurement ranges to 80" (2.0 m)	E1, E2, E3	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$					
Alternate wire rope exit Measurement ranges 100" (2.5 m) and greater.	E1, E2, E3	E1 E2 E2 E3 E3 E3 E3 E3 E3 E3 E3 E3 E3					

Specifications subject to change without notice.

HX SERIES SUPPLEMENTAL DATA

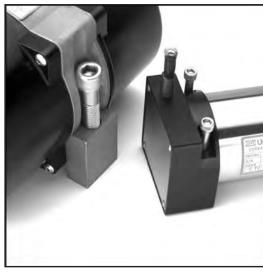

Typical HX mounting bolts.

MECHANICAL SPECIFICATIONS **Mechanical Specifications** Available Measurement Ranges.....See Table 12 Construction Ranges 80" (2 m) and under.....Anodized Aluminum Mounting Base, Stainless Steel & Anodized Aluminum Housing Ranges 100" (2.5 m) and greater Stainless Steel Mounting Base High Impact, Corrosion Resistant Thermoplastic Housings Wire Rope TensionSee Table 12 Wire Rope Diameter.....See Table 12 WeightSee Table 12 Connector.....MS3102A-14S-6P Mating Connector (included)MS3106E-14S-6S Optional NEMA 6 Capability.....Bulkhead fitting with shielded, twisted pair cable Life* Ranges 2" to 6".....5,000,000 full stroke cycles


Ranges 10" to 25".....500,000 full stroke cycles Ranges 30" to 400".....250,000 full stroke cycles Ranges 500" to 2000".....200x10⁶ lineal inches

 * with 1K ohm potentiometer, wire rope misalignment 2° maximum at full stroke, relatively dust free environment, nylon jacketed wire rope on units with ranges 80" and less.

Use value from this column to indicate over- all measurement range					Check mark indicates available measurement range							TABLE 12
MEASUREMENT RANGE DESIGNATOR	MEASUREMENT RANGES		APPLIC HX-PA HX-PB HX-P420	ABLE S	HX-V HX-VP (NOMINAL)		WIRE ROPE DIAMETER		TRANSDUCER WEIGHT		Product Photo	
	(in)	(mm)	HX-P510 HX-P1010			(oz)	(N)	(in)	(mm)	(lb)	(Kg)	
2	2	50	~	-	~	34	9.4	.016	0.4	2	0.9	
3	3	75	~	-	~	24	6.7	.016	0.4	2	0.9	
4	4	100	~	-	~	24	6.7	.016	0.4	2	0.9	9
5	5	125	~	-	~	19	5.3	.016	0.4	2	0.9	
6	6	150	~	-	~	24	6.7	.016	0.4	2	0.9	
10	10	250	~	~	~	34	9.4	.016	0.4	2	0.9	1 The second second
15	15	390	~	-	~	24	6.7	.016	0.4	2	0.9	· ·
20	20	500	~	-	~	24	6.7	.016	0.4	2	0.9	1. A A A A A A A A A A A A A A A A A A A
25	25	640	~	~	~	19	5.3	.016	0.4	2	0.9	
30	30	750	~	-	~	24	6.7	.016	0.4	2	0.9	
40	40	1000	~	-	~	24	6.7	.016	0.4	2	0.9	
50	50	1250	~	~	~	19	5.3	.016	0.4	2	0.9	
60	60	1500	~	~	~	24	6.7	.016	0.4	2	0.9	
80	80	2.0m	~	~	~	21	5.8	.016	0.4	2	0.9	
	100						40.0					
100	100	2.5m	~	~	~	36	10.0	.024	0.6	6.8	3.1	
120	120	3.0m	V		~	36	10.0	.024	0.6	6.8	3.1	
150	150	3.8m	~			36	10.0	.024	0.6	6.8	3.1	
200 250	200 250	5.0m 6.3m			~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	36	10.0 10.0	.024	0.6 0.6	6.8 6.8	3.1 3.1	
300	300	6.3m 7.5m	V	~	~	36	10.0	.024	0.6	6.8	3.1	
300	300	7.5m 8.8m			~	36	10.0	.024	0.6	6.8	3.1	
400	400	10.0m	V	V	~	36	10.0	.024	0.6	6.8	3.1	
400	400	10.011			•	30	10.0	.024	0.0	0.0	5.1	
500	500	12.5m	~	~	~	36	10.0	.024	0.6	8.6	3.9	
600	600	12.5m	~	V	V	36	10.0	.024	0.6	8.6	3.9	
800	800	20.3m	~	~	~	36	10.0	.024	0.6	8.6	3.9	Could have been a second
	000	20.011	•		•		10.0	.024	0.0	0.0	0.0	
1000	1000	25.4m	V	V	-	36	10.0	.024	0.6	12.0	5.4	U III
1200	1200	30.4m	~	V	_	36	10.0	.024	0.6	12.0	5.6	
	1200	50. mi		Ē					0.0		5.0	
1600	1600	40.6m	~	~	-	36	10.0	.024	0.6	14.1	6.4	
			-						0.0			
1800	1800	45.7m	~	~	-	36	10.0	.021	0.6	15.9	7.2	
2000	2000	50.8m	V	V	-	36	10.0	.021	0.5	16.3	7.4	

Specifications subject to change without notice.

HX SERIES SUPPLEMENTAL DATA

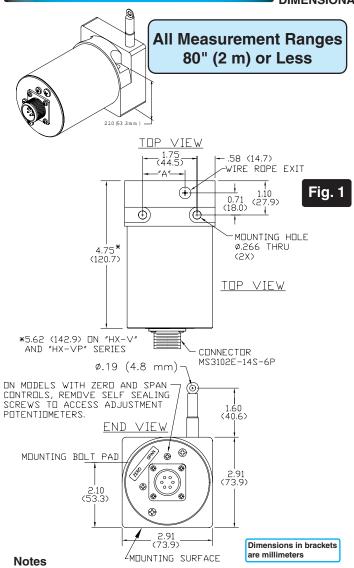

1. Transducer mounts with Ø.25 or M6 socket head cap bolts.

Table 13							
RANGE	"A"						
2", 10"	1.21 (30.7)						
3", 15", 30"	1.37 (34.8)						
4", 20", 40"	1.53 (38.9)						
5", 25", 50"	1.69 (42.9)						
60"	1.84 (46.7)						
80"	2.08 (52.8)						


Table 14

RANGE	DIM "A"	DIM "B"		
Ranges to 800"	7.70 (196)	3.80 (97)		
1000" to 2000"	11.0 (280)	5.60 (142)		

Notes

1. Transducer mounts with \emptyset .50 or M12 socket head cap bolts. 2. Dimension "C" is the cable offset that occurs as the cable is extended from the transducer.

For "C" in inches, C = .0016 x E where E = extension in inches. For "C" in millimeters, C = .0016 x E where E = extension in mm.

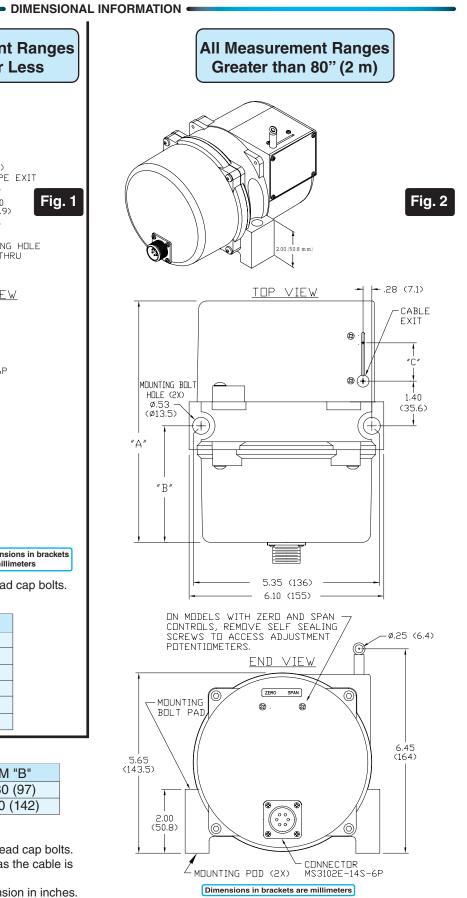

Specifications subject to change without notice.

Contraction Contra